



Durston Belt Sander Instructions

Please read before unpacking your Belt Sander.



If you have any further queries or questions relating to your Belt Sander, please do not hesitate to contact us:




support@durston.com




+44 (0) 1494 535388 / +44 (0) 1494 526777

Parts List

Belt Sander Body x 1




3 Footed Stand x 1




Clamp x 1



Power Supply x 1

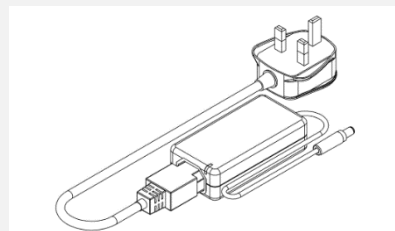

Allen Keys x 2





Safety

- Always make sure that the belt sander is secured.
- Always wear safety glasses, protective clothing, and tie long hair back.
- Always concentrate and do not get distracted.
- Always keep guards in place.
- Keep the area around the belt sander clean, free from clutter, free from tools and no water or liquids.
- Inspect power cord for damage each time before you start using the belt sander.
- Do not use the belt sander with people near you. Always ensure visitors, children etc are always kept away from the belt sander.

Clamping Belt Sander

There are two ways to clamp your belt sander.


If you are using the 3 footed stand, place the locating spindle into the hole at the top and use the large allen key to tighten the screw underneath and secure the locating spindle. Screw the stand to a sturdy bench or work surface.

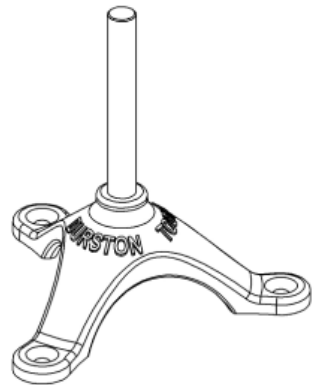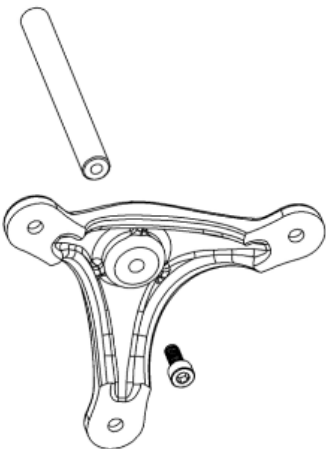

If you are using the clamp, ensure that the clamp is tightened to the bench and is secure. Once the clamp is in position, place the locating spindle in the top hole and use the smaller allen key to tighten the grub screw and secure the locating spindle. Periodically check the clamp to make sure that it is still tight to the bench before using your belt sander.







Fixing the Belt Sander to the Clamp

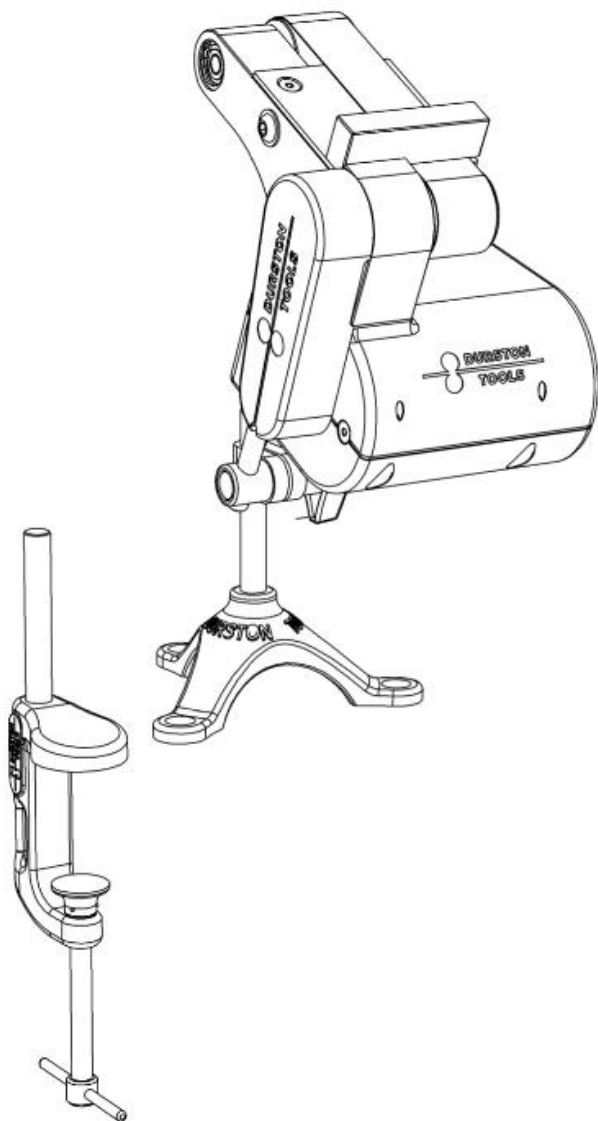


To fix the belt sander to the clamp, simply place the sleeve over the spindle and tighten with the black knob.

Multiple Positions


Your belt sander can be used in several different positions. To change the position, you will loosen the black plastic knob and adjust the belt sander to any angle to suit your needs, or you can simply lay the sander on the bench.

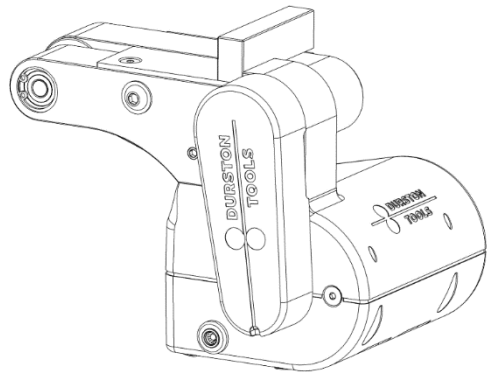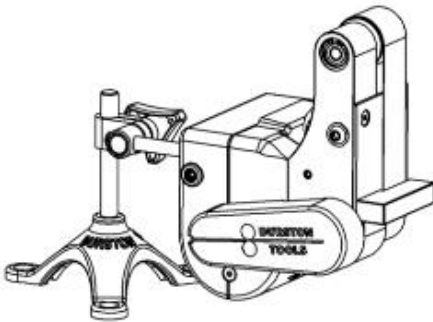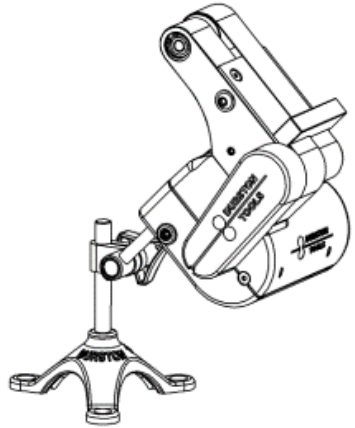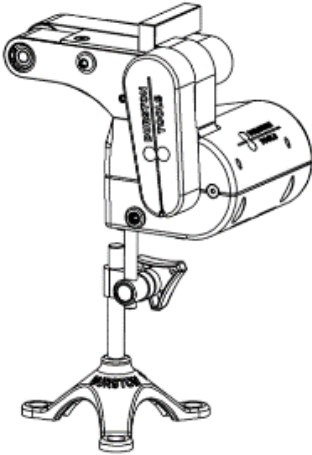

Changing/Tightening the Belt

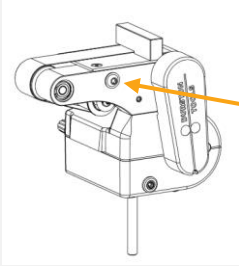


1. Loosen this screw.

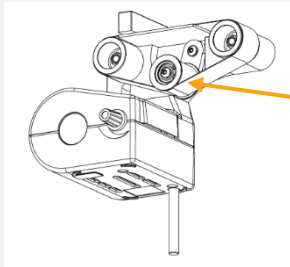


2. Rotate clockwise to loosen the belt.

3. Remove the existing belt and replace with the new belt.

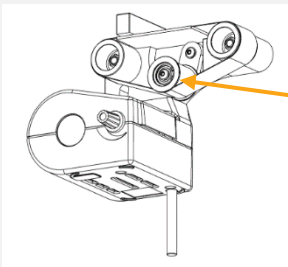

4. Rotate anticlockwise to tighten the belt.

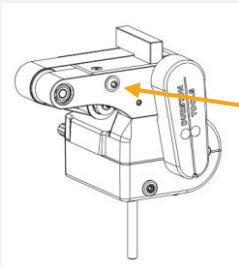

5. Tighten this screw.

Check that all screws and parts are as they were originally before using your belt sander again after changing the belt.

